

# 21.5" TFT touch monitor and 5 wires resistive touch



## RESISTIVE TOUCH PANEL

- Touch / Glass - 5 wires resistive touch
- Audio - 2 x built-in
- VESA Mounting
- Viewing Angle: 178°(H) /178°(V)
- Highest Resolution 1920x1080
- Operating temperature range: 5~40°C



# FAC21A

## Specifications

### SYSTEM

Bezel Plastic	Bezel Plastic
Dimension	525.3(W) 320.3(H)55.8(D) mm
Mounting	VESA - 100*100
I/O Ports	I/O - VGA + DVI +Audio + USB + DC
Compliance	FCC / CE / TUV, RoHS / WEEE / REACH

### TOUCH

Touch Type	5 wires resistive touch
Touch Controller	USB

### POWER

Power	12V/5A 60W
Power Consumption	29.3W


### ENVIRONMENTAL SPECIFICATION

Operating Temp.	Operating : 5 ~ 40°C
Storage Temp.	Storage : -10 ~ 60°C
Relative Humidity	Operating : 20 ~ 80%
Storage Humidity	Storage : 10 ~ 90%

### LCD DISPLAY

Size	21.5"
Resolution	1920 x 1080
Contrast Ratio	3000:1
Brightness	250 cd/m <sup>2</sup>
Pixel Pitch	248.25(per one triad)x248.25 um
Viewing Angle(Typ.)	178°(H) /178°(V)
Response time (Typ.)	25 ms (Rise Time + Fall Time)
Audio	2W ( 2 W / 8Ω) speaker x 2
Display Modes	640 x 350 / 720 x 400 / 640 x 480 800 x 600 / 1024 x 768 / 1280 x 1024 1360 x 768 / 1680 x 1050 / 1920 x 1080

## Dimension

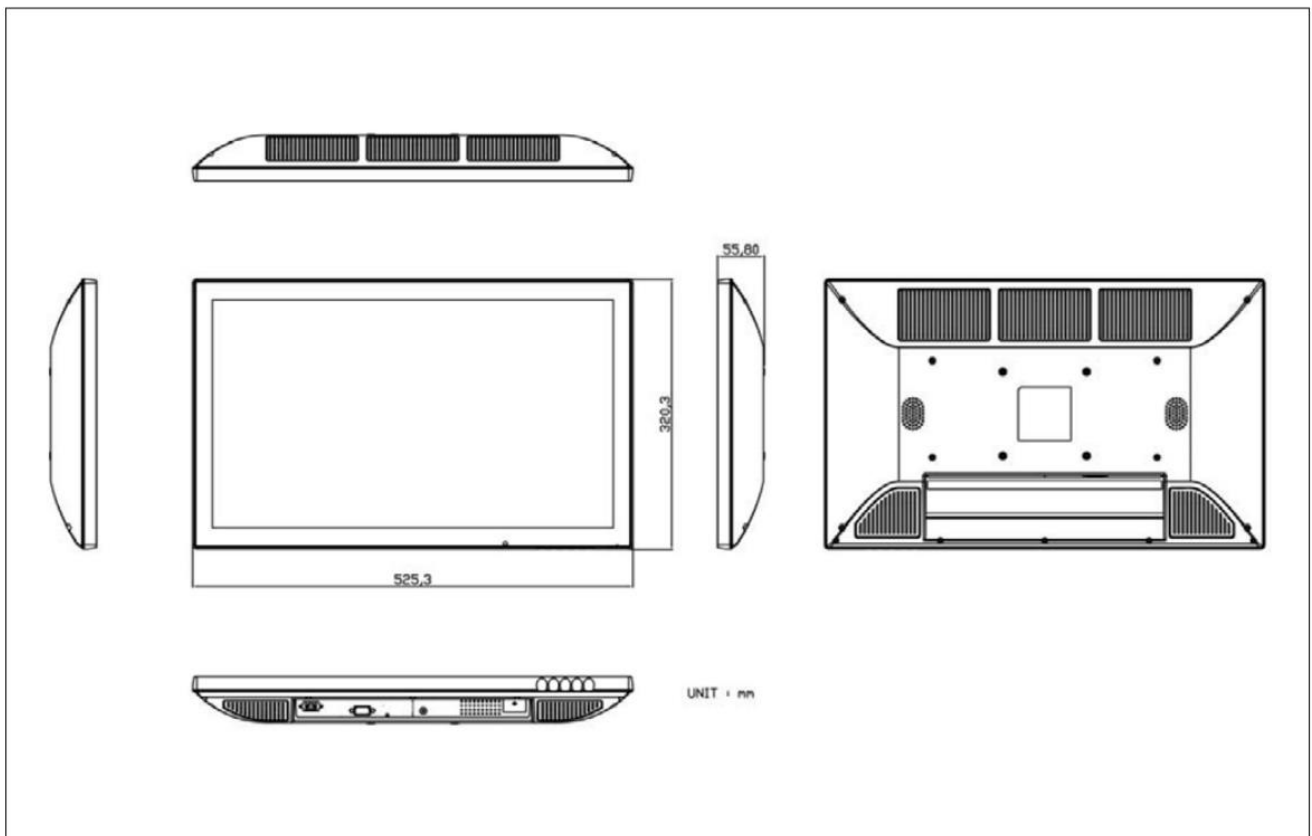

## Ordering Information

21.5" TFT touch monitor and 5 wires resistive touch

21.5" TFT touch monitor and 5 wires resistive 21.5", 1920 x 1080, 250 cd/m<sup>2</sup>, 2W ( 2 W / 8Ω) speaker x 2, I/O - VGA + DVI +Audio + USB + DC, TUV Certified