


# M.2 2280 3G-SDI Capture Card

4 Channel SDI + 1080P60

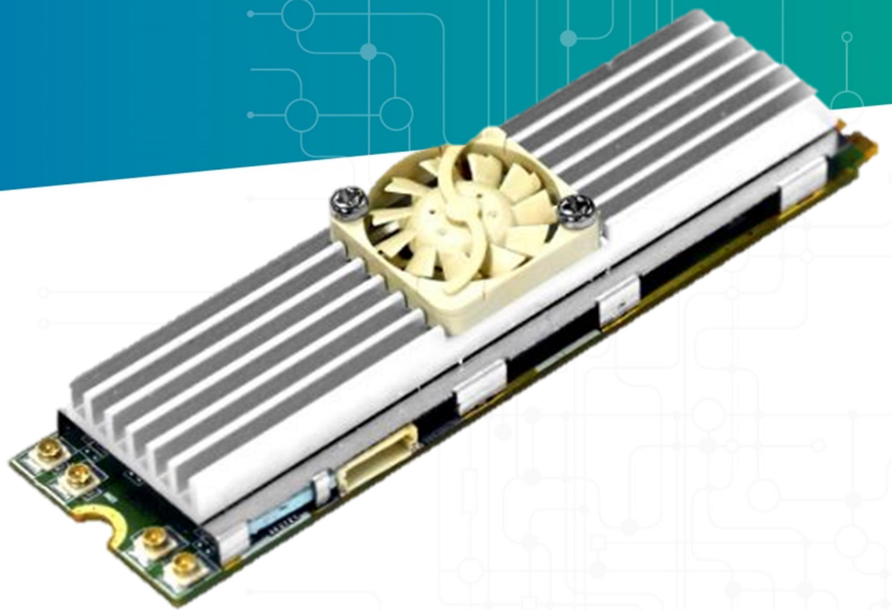

## Main Feature

- Max Input Resolution : 1920×1080p@60/50fps
- Video Input : 4 x SDI
- Video Foramt : YV12, NV12, YUY2, RGB24, RGB32, P010
- Audio Input : 4 × Stereo Embedded Audio
- Audio Format : Stereo / 16-bit / 32000~48000Hz
- Interface : M.2 2280(PCIe x 4)

**MT325**

**Specifications**

**Main**

Model Name	MT325
Max Input Resolution	1920×1080p@60/50fps
Recording Mode	Software Compression, Real-Time Mode
Intermace	M.2 2280 M-Key (PCIe x 4)
Dimension	22 x 80(mm)
Feature	Multi Instances Multi Devices

**Video**

Input	1 x SDI
Output	N/A
Color Format	Capture/Preview : 4:4:4 8Bit RGB24 4:4:4 8Bit RGB32 4:2:2 8Bit YUY2 4:2:0 8Bit YV12, NV12 4:2:0 10Bit P010
Video Processing	Video, Audio and VANC Capture Video Cropping and Scaling Auto Signal Detection Deinterlace Engine Multi Instances
Video Resolution	3G-SDI : 1920×1080p@60/50fps HD-SDI : 1920×1080p@30/25/24fps 1920×1080i@60/50fps 1280×720p@60/50fps SD-SDI : 720×480i@60fps 720×576i@50fps

**Audio**

Input	1×Stereo Embedded Audio
-------	-------------------------

Audio L/R ( Through Wafer Connector )

Audio Fornat Stereo / 16-bit / 32000 ~ 48000Hz

## OS Support

OS Support Windows 7/Windows 8/Windows 8.1/Windows 10/Windows 11  
Linux 2.6.14 or Higher ( 32-bit and 64-bit )  
Linux ARM  
nVIDIA Jetson TX2, NANO, AGX Xavier, Xavier NX

## Ordering Information

Model	Description
MT325	M.2 2280 M-Key (PCIe x 4) 4 Channel 1080P60 3G-SDI Capture

## Dimension

